


Galleon II 3P/3P LV 10-40KVA

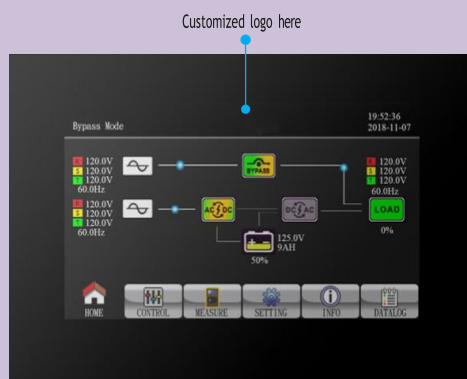

4.3" Touch LCD Panel

• DSP technology guarantees high reliability

A Digital Signal Processor (DSP) technology digitizes the data and mathematically manipulates them to provide an improved solution with higher performance with technology IGBT

• Output power factor 1

For critical applications, this 3-phase online UPS with output power factor 1.0 ensures higher efficiency and advanced performance.

• Active power factor correction in all phases

Power factor correction is active in all phases and it can improve the efficiency of input.

• Dual Inputs

Galleon II 33 LV series is also available for optional dual inputs to support various inputs to have flexibility for system configuration.

• 50Hz/60Hz frequency converter mode

Lock output frequency at 50Hz or 60Hz to suit power sensitive equipments.

• ECO mode operation for energy saving

ECO mode improves the efficiency up to 98% to cut energy usage & cost. In this mode, loads are supplied by the mains directly. While mains failure, the UPS will constantly supply the power to the connected device without any interruption.

• Emergency power off function (EPO)

In case of any emergency and fire, the EPO control mechanism can instantly shut down the system.

• Protection

Electro Magnetic Interference (EMI) and Radio Frequency Interference (RFI). Transient Surge Suppressors (TVSS)

Very powerful charger

Galleon II 33 LV series is built-in super charger.

10K: 10A maximum

15~20K: 20A maximum

30K~40K: 24A maximum

It's also support very long runtime applications when connecting to big capacity of external battery cabinet.

• Parallel operation with common battery

Maximum three UPSs can be operated in parallel, increasing the capacity and performance. Besides, this parallel UPS system can share common battery packs which might greatly reduce the expense and reach the same performance.

• High overload capability

Supporting 110% overload capacity for 60 min and up to 1 min overload condition at 150% load.

• Adjustable battery design

The number of connected batteries can be adjusted flexibly based on different power demands. This feature can allow UPS to keep running even when some battery packs are damaged.

• 4.3" touch LCD for comprehensive UPS information



Galleon II 3-Phase in/3-Phase out 208/220Vac Online UPS Selection Guide

MODEL		10K (L)	15K(L)	20K (L)	30KL	40KL
PHASE		3-phase in / 3-phase out				
CAPACITY		10KVA /10KW	15KVA /15KW	20KVA /20KW	30KVA /30KW	40KV /40KW
INPUT						
Nominal Voltage		3 x 200/208/220 VAC (Ph-Ph) 3 x 120/127 VAC (Ph-N)				
Voltage Range		138~270 VAC (3-phase) @ 50% load; 173~253 VAC (3-phase) @ 100% load 80~156 VAC (Ph-N) @ 50% load ; 100~146 VAC (Ph-N) @ 100% load				
Frequency Range		46~54 Hz or 56~64Hz				
Power Factor		≥ 0.99 @ 100% Load				
OUTPUT						
Output Voltage		3 x 200/208/220 VAC (Ph-Ph) 3 x 120/127 VAC (Ph-N)				
AC Voltage Regulation (Batt. Mode)		± 1%				
Frequency Range (Synchronized Range)		46~54Hz or 56~64Hz				
Protection		Transient Surge Suppressors (TVSS) and Filter EMI - RFI				
Current Crest Ratio		3:1 (max.)				
Harmonic Distortion		≤ 2 % THD (Linear Load) ; ≤ 4 % THD (Non-linear Load PF≥0.8)				
Transfer Time	AC Mode to Batt. Mode	Zero				
	Inverter to Bypass	Zero				
Waveform (Batt. Mode)		Pure Sine wave				
Overload	AC Mode	100-110% for 1 hr, 110-130% for 1 min, >130% for 1 second				
	Battery Mode	100-110% for 30 seconds, 110-130% for 10 seconds, >130% for 1 second				
EFFICIENCY						
AC Mode		94%				
ECO Mode		99%				
Battery Mode		92.5%				
BATTERY						
Standard Model	Battery Type	12 V/9 Ah	12 V/9 Ah	12 V/9 Ah	12 V/7 Ah	12 V/9 Ah
	Numbers	(10+10)pcs x 1 string Optional for max. 2 strings	(10+10)pcs x 2 strings Optional for max. 3 strings	(10+10)pcs x 3 strings	N/A	
	Typical Recharge Time	9 hours recover to 90% capacity				
	Charging Current (max.)	1A/2A/3A/4A (Adjustable)				
	Charging Voltage	+/-136.5 VDC ± 10%				
Long-run Model	Battery Type	Depending on the capacity of external batteries				
	Numbers	16~20 pcs (Adjustable)				
	Charging Current (max.)	4A/8A/12A (Adjustable) Max. 12A	4A/8A/12A (Adjustable) Parallelable up to 20A (Optional)		4A/8A/12A/16A (Adjustable) Parallelable up to 24A (Optional)	
	Charging Voltage	+/-13.65V*N (N = 8~10)				
INDICATORS						
LCD Display		UPS status, Load level, Battery level, Input/Output voltage, Discharge timer, and Fault conditions				
PHYSICAL						
Standard Model	Dimension,DxWxH (mm)	667 x 250 x 827	865 x 300 x 1020		N/A	
	Net Weight (kgs)	95	181	231		
Long-run Model	Dimension,DxWxH (mm)	667 x 250 x 827	865 x 300 x 1020		790 x 420 x 1200	
	Net Weight (kgs)	45	80	81	150	160
ENVIRONMENT						
Operation Temperture		0-40°C				
Operation Humidity		< 95% and non-condersing				
Noise Level		Less than 50dB @ 1 Meter	Less than 55dB @ 1 Meter			Less than 65 dB@ 1 Meter
MANAGEMENT						
Smart RS-232 / USB		Supports Windows ² 2000/2003/XP/Vista/2008, Windows ² 7/8/10, Linux and MAC				
Optional SNMP		Power management from SNMP manager and web browser				
Certifications		UL 1778 – RETIE – ENERGY STAR - IEC				

*If the UPS is installed or used in a place where the altitude is above than 1000m, the output power must be derated 1% per 100m.
Product specifications are subject to change without further notice.